




# CR1000

measurement & control datalogger

A rugged  
instrument with  
research-grade  
performance.

# CR1000 Measurement and Control System

The CR1000 provides precision measurement capabilities in a rugged, battery-operated package. It consists of a measurement and control module and a wiring panel. Standard operating range is -25° to +50°C; an optional extended range of -55° to +85°C is available.

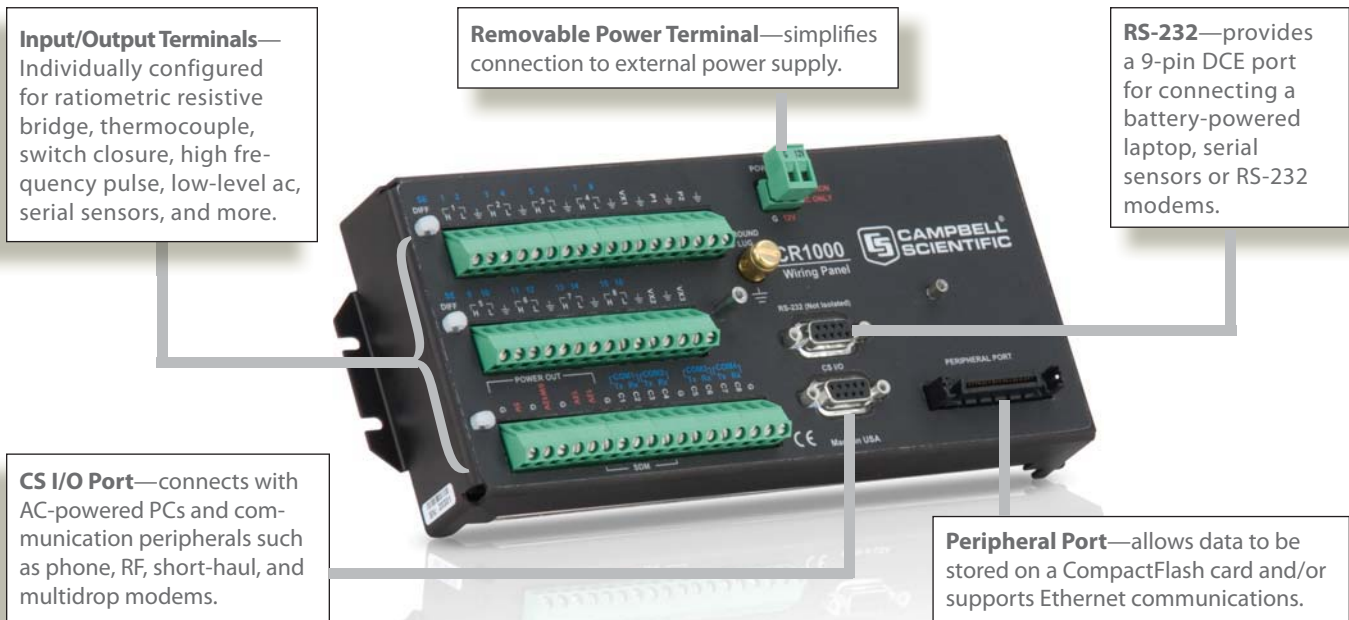

## Features

- 4 Mbyte memory\*
- Program execution rate of up to 100 Hz
- CS I/O and RS-232 serial ports
- 13-bit analog to digital conversions
- 16-bit H8S Renesas Microcontroller with 32-bit internal CPU architecture
- Temperature compensated real-time clock
- Background system calibration for accurate measurements over time and temperature changes
- Single DAC used for excitation and measurements to give ratio metric measurements
- Gas Discharge Tube (GDT) protected inputs
- Data values stored in tables with a time stamp and record number
- Battery-backed SRAM memory and clock ensuring data, programs, and accurate time are maintained while the CR1000 is disconnected from its main power source
- Serial communications with serial sensors and devices supported via I/O port pairs
- PakBus®, Modbus, DNP3, TCP/IP, FTP, and SMTP protocols supported

## Measurement and Control Module

The module measures sensors, drives direct communications and telecommunications, reduces data, controls external devices, and stores data and programs in on-board, non-volatile storage. The electronics are RF shielded and glitch protected by the sealed, stainless steel canister. A battery-backed clock assures accurate timekeeping. The module can simultaneously provide measurement and communication functions. The on-board, BASIC-like programming language supports data processing and analysis routines.

## Wiring Panel

The CR1000WP is a black, anodized aluminum wiring panel that is compatible with all CR1000 modules. The wiring panel includes switchable 12 V, redistributed analog grounds (dispersed among analog channels rather than grouped), unpluggable terminal block for 12 V connections, gas-tube spark gaps, and 12 V supply on pin 8 to power our COM-series phone modems and other peripherals. The control module easily disconnects from the wiring panel allowing field replacement without rewiring the sensors. A description of the wiring panel's input/output channels follows.

\*Originally, the standard CR1000 had 2 MB of data/program storage, and an optional version, the CR1000-4M, had 4 MB of memory. In September 2007, the standard CR1000 started having 4 MB of memory, making the CR1000-4M obsolete. Dataloggers that have a module with a serial number greater than or equal to 11832 will have a 4 MB memory. The 4 MB dataloggers will also have a sticker on the canister stating "4M Memory".

### *Analog Inputs*

Eight differential (16 single-ended) channels measure voltage levels. Resolution on the most sensitive range is 0.67  $\mu$ V.

### *Pulse Counters*

Two pulse channels can count pulses from high level (5 V square wave), switch closure, or low level AC signals.

### *Switched Voltage Excitations*

Three outputs provide precision excitation voltages for resistive bridge measurements.

### *Digital I/O Ports*

Eight ports are provided for frequency measurements, digital control, and triggering. Three of these ports can also be used to measure SDM devices. The I/O ports can be paired as transmit and receive. Each pair has 0 to 5 V UART hardware that allows serial communications with serial sensors and devices. An RS232-to-logic level converter may be required in some cases.

### *CS I/O Port*

AC-powered PCs and many communication peripherals connect with the CR1000 via this port. Connection to an AC-powered PC requires either an SC32B or SC-USB interface. These interfaces isolate the PC's electrical system from the datalogger, thereby protecting against ground loops, normal static discharge, and noise.

### *RS-232 Port*

This non-isolated port is for connecting a battery-powered laptop, serial sensor, or RS-232 modem. Because of ground loop potential on some measurements (e.g., low level single-ended measurements), AC-powered PCs should use the CS I/O port instead of the RS-232 port (see above).

### *Peripheral Port*

One 40-pin port interfaces with the NL115 Ethernet Interface & CompactFlash Module, the NL120 Ethernet Interface, or the CFM100 CompactFlash® Module.

### *Switched 12 Volt*

This terminal provides unregulated 12 V that can be switched on and off under program control.

## **Storage Capacity**

The CR1000 has 2 MB of flash memory for the Operating System, and 4 MB of battery-backed SRAM for CPU usage, program storage, and data storage. Data is stored in a table format. The storage capacity of the CR1000 can be increased by using a CompactFlash card.

## **Communication Protocols**

The CR1000 supports the PAkBUS, Modbus, DNP3, TCP/IP, FTP, and SMTP communication protocols. With the PAkBUS protocol, networks have the distributed routing intelligence to continually evaluate links. Continually evaluating links optimizes delivery times and, in the case of delivery failure, allows automatic switch over to a configured backup route.

The Modbus RTU protocol supports both floating point and long formats. The datalogger can act as a slave and/or master.

The DNP3 protocol supports only long data formats. The dataloggers are level 2 slave compliant, with some of the operations found in a level 3 implementation.

The TCP/IP, FTP, and SMTP protocols provide TCP/IP functionality when the CR1000 is used in conjunction with an NL115, NL120, or third party serial IP device. Refer to the CR1000 manual for more information.


## **Power Supplies**

Any 12 Vdc source can power the CR1000; a PS100 or BPALK is typically used. The PS100 provides a 7-Ahr sealed rechargeable battery that should be connected to a charging source (either a wall charger or solar panel). The BPALK consists of eight non-rechargeable D-cell alkaline batteries with a 7.5-Ahr rating at 20°C.

Also available are the BP12 and BP24 battery packs, which provide nominal ratings of 12 and 24 Ahrs, respectively. These batteries should be connected to a regulated charging source (e.g., a CH100 connected to an unregulated solar panel or wall charger).

## **Enclosure/Stack Bracket**

A CR1000 housed in a weather-resistant enclosure can collect data under extremely harsh conditions. The 17565 Stack Bracket allows a small peripheral to be placed under the mounting bracket, thus conserving space. With the bracket, the CR1000 can be attached in a "horizontal" orientation in an ENC10/12 enclosure (i.e., the long axis of the CR1000 spanning the short axis of the enclosure).

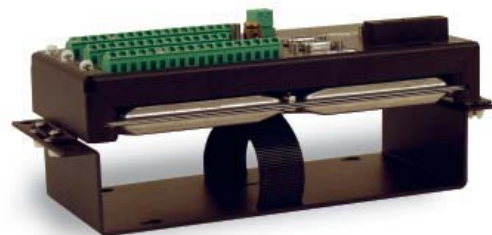

Above is a CR1000 mounted to the stack bracket. The Velcro strap is for fastening a peripheral to the base of the bracket.

## Data Storage and Retrieval Options

To determine the best option for an application, consider the accessibility of the site, availability of services (e.g., cellular phone or satellite coverage), quantity of data to collect, and desired time between data-collection sessions. Some communication options can be combined—increasing the flexibility, convenience, and reliability of the communications.

### *Keyboard Display*

The CR1000KD can be used to program the CR1000, manually initiate data transfer, and display data. The CR1000KD displays 8 lines x 21 characters (64 x 128 pixels) and has a 16-character keyboard. Custom menus are supported allowing customers to set up choices within the datalogger program that can be initiated by a simple “toggle” or “pick list”.



One CR1000KD can be carried from station to station in a CR1000 network.

### *Portable Handheld Devices*

An Archer-PCon or user-supplied PDA can be used to collect and display the CR1000’s data, transfer datalogger programs, graph data for up to two elements, and transfer the datalogger’s data to a PC. User-supplied PDAs require either PConnect or PConnectCE software.

### *Direct Links*

AC-powered PCs connect with the datalogger’s CS I/O port via an SC32B or SC-USB interface. These interfaces provide optical isolation. A battery-powered laptop can be attached to the CR1000’s RS-232 port via an RS-232 cable—no interface required.

### *External Data Storage Devices*

A CFM100 or NL115 module can store the CR1000’s data on an industrial-grade CompactFlash (CF) card (2 GB or less). The PC reads the CF card using either the CF1 CompactFlash Adapter or a 17752 USB Reader/Writer. The CR1000 can also store data on an SC115 2-GB Flash Memory Drive.

### *Mountable Displays*

The CD100 and CD295 can be mounted in an enclosure lid. The CD100 has the same functionality and operation as the CD1000KD, allowing both data entry and display without opening the enclosure. The CD295 displays real-time data only.

### *Short Haul Modems*

The SRM-5A RAD Short Haul Modem supports communications between the CR1000 and a PC via a four-wire unconditioned line (two twisted pairs).

### *Multidrop Interface*

The MD485 intelligent RS-485 interface permits a PC to address and communicate with one or more dataloggers over the CABLE2TP two-twisted pair cable. Distances up to 4000 feet are supported.

### *Ethernet*

Use of an NL200, NL120, NL115, or NL100 interface enables the CR1000 to communicate over a local network or a dedicated Internet connection via TCP/IP. The NL115 can also store data on a CompactFlash card.

### *Radios*


Radio frequency (RF) communications are supported via narrow-band UHF, narrow-band VHF, spread spectrum, or meteor burst radios. Line-of-sight is required for all of our RF options.

### *Telephone Networks*

The CR1000 can communicate with a PC using landlines, cellular CDMA, or cellular GPRS transceivers. A voice synthesized modem enables anyone to call the CR1000 via phone and receive a verbal report of real-time site conditions.

### *Satellite Transmitters*

Our NESDIS-certified GOES satellite transmitter provides one-way communications from a Data Collection Platform (DCP) to a receiving station. We also offer an Argos transmitter that is ideal for high-altitude and polar applications.

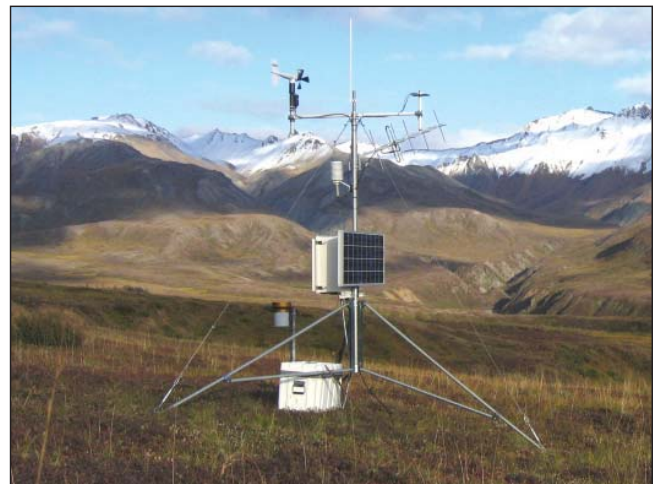

This weather station at Denali National Park, Alaska, transmits data via a GOES satellite transmitter.

## Channel Expansion

### 4-Channel Low Level AC Module

The LLAC4 is a small peripheral device that allows customers to increase the number of available low-level ac inputs by using control ports. This module is often used to measure up to four anemometers, and is especially useful for wind profiling applications.

### Synchronous Devices for Measurement (SDMs)

SDMs are addressable peripherals that expand the datalogger's measurement and control capabilities. For example, SDMs are available to add control ports, analog outputs, pulse count channels, interval timers, or even a CANbus interface to the system. Multiple SDMs, in any combination, can be connected to one datalogger.

### Multiplexers

Multiplexers increase the number of sensors that can be measured by a CR1000 by sequentially connecting each sensor to the datalogger. Several multiplexers can be controlled by a single CR1000.



The CR1000 is compatible with the AM16/32B (shown above) and AM25T multiplexers.

## Software


### Starter Software

Our easy-to-use starter software is intended for first time users or applications that don't require sophisticated communications or datalogger program editing. SCWin Short Cut generates straight-forward CR1000 programs in four easy steps. PC200W allows customers to transfer a program to, or retrieve data from a CR1000 via a direct communications link.

At [www.campbellsci.com/downloads](http://www.campbellsci.com/downloads) you can download starter software at no charge. Our Resource CD also provides this software as well as PDF versions of our brochures and manuals.

### Datalogger Support Software

Our datalogger support software packages provide more capabilities than our starter software. These software packages contains program editing, communications, and display tools that can support an entire datalogger network.

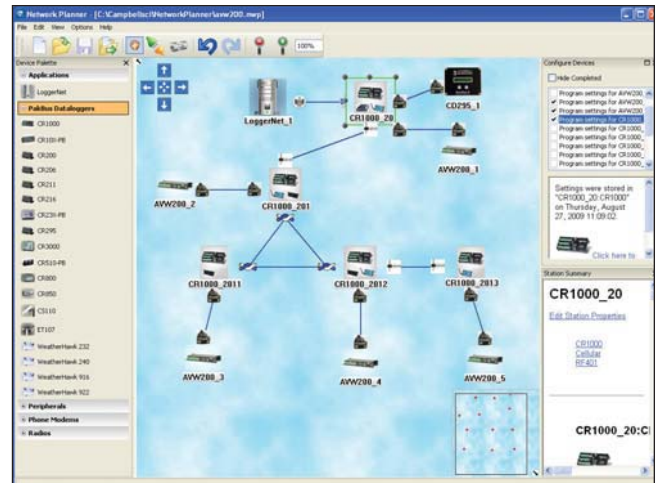


The Network Planner, included in LoggerNet 4 or higher, generates device settings and configures the LoggerNet network map for PakBus networks.

PC400, our mid-level software, supports a variety of telemetry options, manual data collection, and data display. For programming, it includes both Short Cut and the CRBasic program editor. PC400 does not support combined communication options (e.g., phone-to-RF), PakBus® routing, or scheduled data collection.

RTDAQ is an ideal solution for industrial and real-time users desiring to use reliable data collection software over a single telecommunications medium, and who do not rely on scheduled data collection. RTDAQ's strength lies in its ability to handle the display of high speed data.

LoggerNet is Campbell Scientific's full-featured datalogger support software. It is referred to as "full-featured" because it provides a way to accomplish almost all the tasks you'll need to complete when using a datalogger. LoggerNet supports combined communication options (e.g., phone-to-RF) and scheduled data collection.

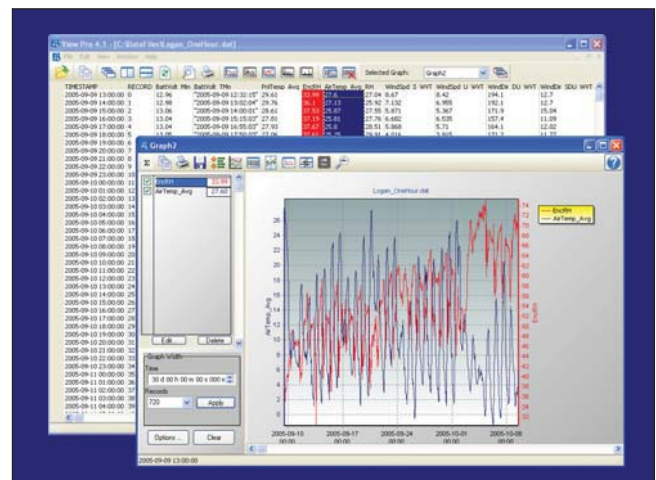

Both LoggerNet and RTDAQ use View Pro to display historical data in a tabular or graphical format.

## Applications

The measurement precision, flexibility, long-term reliability, and economical price of the CR1000 make it ideal for scientific, commercial, and industrial applications.

### *Meteorology*

The CR1000 is used in long-term climatological monitoring, meteorological research, and routine weather measurement applications.



Our rugged, reliable weather station measures meteorological conditions at St. Mary's Lake, Glacier National Park, MT.

Sensors the CR1000 can measure include:

- cup, propeller, and sonic anemometers
- tipping bucket rain gages
- wind vanes
- pyranometers
- ultrasonic ranging sensor
- thermistors, RTDs, and thermocouples
- barometric pressure sensors
- RH sensors
- cooled mirror hygrometers

### *Agriculture and Agricultural Research*

The versatility of the CR1000 allows measurement of agricultural processes and equipment in applications such as:

- plant water research
- canopy energy balance
- machinery performance
- plant pathology
- crop management decisions
- food processing/storage
- frost prediction
- irrigation scheduling
- integrated pest management



This vitaculture site in Australia integrates meteorological, soil, and crop measurements.

### *Wind Profiling*

Our data acquisition systems can monitor conditions at wind assessment sites, at producing wind farms, and along transmission lines. The CR1000 makes and records measurements, controls electrical devices, and can function as PLCs or RTUs. Because the datalogger has its own power supply (batteries, solar panels), it can continue to measure and store data and perform control during power outages.

Typical sensors for wind assessment applications include, but are not limited to:

- sonic anemometers
- three-cup and propeller anemometers (up to 10 anemometers can be measured by using two LLAC4 peripherals)
- wind vanes
- temperature sensors
- barometric pressure
- wetness
- solar radiation



Photo courtesy npower renewables

For turbine performance applications, the CR1000 monitors electrical current, voltage, wattage, stress, and torque.

A Campbell Scientific system monitors an offshore wind farm in North Wales.

### *Soil Moisture*

The CR1000 is compatible with the following soil moisture measurement technologies:

- Soil moisture blocks are inexpensive sensors that estimate soil water potential.
- Matric water potential sensors also estimate soil water potential but are more durable than soil moisture blocks.
- Time-Domain Reflectometry Systems (TDR) use a reflectometer controlled by a CR1000 to accurately measure soil water content. Multiplexers allow sequential measurement of a large number of probes by one reflectometer, reducing cost per measurement.
- Self-contained water content reflectometers are sensors that emit and measure a TDR pulse.
- Tensiometers measure the soil pore pressure of irrigated soils and calculate soil moisture.

### *Air Quality*

The CR1000 can monitor and control gas analyzers, particle samplers, and visibility sensors. It can also automatically control calibration sequences and compute conditional averages that exclude invalid data (e.g., data recorded during power failures or calibration intervals).

### *Road Weather/RWIS*

Our fully NTCIP-compliant Environmental Sensor Stations (ESS) are robust, reliable weather stations used for road weather/RWIS applications. A typical ESS includes a tower, CR1000, two road sensors, remote communication hardware, and sensors that measure wind speed and direction, air temperature, humidity, barometric pressure, solar radiation, and precipitation.

### *Water Resources/Aquaculture*

Our CR1000 is well-suited to remote, unattended monitoring of hydrologic conditions. Most hydrologic sensors, including SDI-12 probes, interface directly to the CR1000. Typical hydrologic measurements:

- **Water level** is monitored with incremental shaft encoders, double bubblers, ultrasonic ranging sensors, resistance tapes, strain gage pressure transducers, or vibrating wire pressure transducers. Vibrating wire transducers require an AVW200-series or another vibrating wire interface.
- **Ionic conductivity** measurements use one of the switched excitation ports from the CR1000.
- **Samplers** are controlled by the CR1000 as a function of time, water quality, or water level.
- **Alarm and pump actuation** are controlled through digital I/O ports that operate external relay drivers.



A turbidity sensor was installed in a tributary of the Cedar River watershed to monitor water quality conditions for the city of Seattle, Washington.

### *Vehicle Testing*

This versatile, rugged datalogger is ideally suited for testing cold and hot temperature, high altitude, off-highway, and cross-country performance. The CR1000 is compatible with our SDM-CAN interface and GPS16X-HVS receiver.



Vehicle monitoring includes not only passenger cars, but airplanes, locomotives, helicopters, tractors, buses, heavy trucks, drilling rigs, race cars, and motorcycles.

The CR1000 can measure:

- **Suspension**—strut pressure, spring force, travel, mounting point stress, deflection, ride
- **Fuel system**—line and tank pressure, flow, temperature, injection timing
- **Comfort control**—fan speed, ambient and supply air temperature, refrigerant pressures, solar radiation, ac on and off, time-to-comfort, blower current
- **Brakes**—line pressure, pedal pressure and travel, ABS, line and pad temperature
- **Engine**—pressure, temperature, crank position, RPM, time-to-start, oil pump cavitation
- **General vehicle**—chassis monitoring, road noise, vehicle position and speed, steering, air bag, hot/cold soaks, wind tunnels, traction, CANbus, wiper speed and current, vehicle electrical loads

### *Other Applications*

- Eddy covariance systems
- Wireless sensor/datalogger networks
- Mesonet systems
- Avalanche forecasting, snow science, polar, high altitude
- Fire weather
- Geotechnical
- Historic preservation

# CR1000 Specifications

Electrical specifications are valid over a -25° to +50°C range unless otherwise specified; non-condensing environment required. To maintain electrical specifications, Campbell Scientific recommends recalibrating dataloggers every two years. We recommend that the system configuration and critical specifications are confirmed with Campbell Scientific before purchase.

## PROGRAM EXECUTION RATE

10 ms to one day @ 10 ms increments

**ANALOG INPUTS** (SE1-SE16 or DIFF1-DIFF8)  
8 differential (DF) or 16 single-ended (SE) individually configured. Channel expansion provided by AM16/32B and AM25T multiplexers.

**RANGES AND RESOLUTION:** Basic resolution (Basic Res) is the A/D resolution of a single conversion. Resolution of DF measurements with input reversal is half the Basic Res.

Range (mV) <sup>1</sup>	DF Res (μV) <sup>2</sup>	Basic Res (μV)
±5000	667	1333
±2500	333	667
±250	33.3	66.7
±25	3.33	6.7
±7.5	1.0	2.0
±2.5	0.33	0.67

<sup>1</sup>Range overhead of ~9% on all ranges guarantees that full-scale values will not cause over range.

<sup>2</sup>Resolution of DF measurements with input reversal.

## ACCURACY<sup>3</sup>:

±(0.06% of reading + offset), 0° to 40°C

±(0.12% of reading + offset), -25° to 50°C

±(0.18% of reading + offset), -55° to 85°C (-XT only)

<sup>3</sup>Accuracy does not include the sensor and measurement noise. The offsets are defined as:

Offset for DF w/input reversal = 1.5·Basic Res + 1.0 μV

Offset for DF w/o input reversal = 3·Basic Res + 2.0 μV

Offset for SE = 3·Basic Res + 3.0 μV

**INPUT NOISE VOLTAGE:** For DF measurements with input reversal on ±2.5 mV input range; digital resolution dominates for higher ranges.

250 μs Integration: 0.34 μV RMS

50/60 Hz Integration: 0.19 μV RMS

## ANALOG MEASUREMENT SPEED:

Integrat- ion Type/ Code	Integrat- ion Time	Settling Time	Total Time <sup>5</sup>	
			SE w/ No Rev	DF w/ Input Rev
250	250 μs	450 μs	~ 1 ms	~ 12 ms
60 Hz <sup>4</sup>	16.67 ms	3 ms	~ 20 ms	~ 40 ms
50 Hz <sup>4</sup>	20.00 ms	3 ms	~ 25 ms	~ 50 ms

<sup>4</sup>AC line noise filter.

<sup>5</sup>Includes 250 μs for conversion to engineering units.

**INPUT LIMITS:** ±5 V

**DC COMMON MODE REJECTION:** >100 dB

**NORMAL MODE REJECTION:** 70 dB @ 60 Hz when using 60 Hz rejection

**SUSTAINED INPUT VOLTAGE W/O DAMAGE:** ±16 Vdc max.

**INPUT CURRENT:** ±1 nA typical, ±6 nA max. @ 50°C; ±90 nA @ 85°C

**INPUT RESISTANCE:** 20 Gohms typical

**ACCURACY OF BUILT-IN REFERENCE JUNCTION THERMISTOR** (for thermocouple measurements): ±0.3°C, -25° to 50°C  
±0.8°C, -55° to 85°C (-XT only)

## ANALOG OUTPUTS (Vx1-Vx3)

3 switched voltage, active only during measurement, one at a time.

**RANGE AND RESOLUTION:** Voltage outputs programmable between ±2.5 V with 0.67 mV resolution.

**V<sub>x</sub> ACCURACY:** ±(0.06% of setting + 0.8 mV), 0° to 40°C  
±(0.12% of setting + 0.8 mV), -25° to 50°C  
±(0.18% of setting + 0.8 mV), -55° to 85°C (-XT only)

**V<sub>x</sub> FREQUENCY SWEEP FUNCTION:** Switched outputs provide a programmable swept frequency, 0 to 2500 mv square waves for exciting vibrating wire transducers.

**CURRENT SOURCING/SINKING:** ±25 mA

## RESISTANCE MEASUREMENTS

**MEASUREMENT TYPES:** The CR1000 provides ratiometric measurements of 4- and 6-wire full bridges, and 2-, 3-, and 4-wire half bridges. Precise, dual polarity excitation using any of the 3 switched voltage excitations eliminates dc errors.

**VOLTAGE RATIO ACCURACY<sup>6</sup>:** Assuming excitation voltage of at least 1000 mV, not including bridge resistor error.

±(0.04% of voltage reading + offset)/V<sub>x</sub>

<sup>6</sup>Accuracy does not include the sensor and measurement noise. The offsets are defined as:

Offset for DF w/input reversal = 1.5·Basic Res + 1.0 μV

Offset for DF w/o input reversal = 3·Basic Res + 2.0 μV

Offset for SE = 3·Basic Res + 3.0 μV

Offset values are reduced by a factor of 2 when excitation reversal is used.

## PERIOD AVERAGE

Any of the 16 SE analog inputs can be used for period averaging. Accuracy is ±(0.01% of reading + resolution), where resolution is 136 ns divided by the specified number of cycles to be measured.

## INPUT AMPLITUDE AND FREQUENCY:

Voltage Gain	Input Range (±mV)	Signal (peak to peak) <sup>7</sup>		Min Pulse Width (μV)	Max <sup>8</sup> Freq (kHz)
		Min. (mV)	Max (V)		
1	2500	500	10	2.5	200
10	250	10	2	10	50
33	25	5	2	62	8
100	2.5	2	2	100	5

<sup>7</sup>With signal centered at the datalogger ground.

<sup>8</sup>The maximum frequency = 1/(Twice Minimum Pulse Width) for 50% of duty cycle signals.

## PULSE COUNTERS (P1-P2)

(2) inputs individually selectable for switch closure, high frequency pulse, or low-level ac. Independent 24-bit counters for each input.

**MAXIMUM COUNTS PER SCAN:** 16.7x10<sup>6</sup>

## SWITCH CLOSURE MODE:

Minimum Switch Closed Time: 5 ms

Minimum Switch Open Time: 6 ms

Max. Bounce Time: 1 ms open w/o being counted

## HIGH-FREQUENCY PULSE MODE:

Maximum Input Frequency: 250 kHz

Maximum Input Voltage: ±20 V

Voltage Thresholds: Count upon transition from below 0.9 V to above 2.2 V after input filter with 1.2 μs time constant.

**LOW-LEVEL AC MODE:** Internal AC coupling removes AC offsets up to ±0.5 V.

Input Hysteresis: 12 mV @ 1 Hz

Maximum ac Input Voltage: ±20 V

Minimum ac Input Voltage:

Sine Wave (mV RMS)	Range(Hz)
20	1.0 to 20
200	0.5 to 200
2000	0.3 to 10,000
5000	0.3 to 20,000

## DIGITAL I/O PORTS (C1-C8)

8 ports software selectable, as binary inputs or control outputs. Also provide edge timing, subroutine interrupts/wake up, switch closure pulse counting, high frequency pulse counting, asynchronous communications (UART), SDI-12 communications, and SDM communications.

**HIGH-FREQUENCY MAX:** 400 kHz

**SWITCH CLOSURE FREQUENCY MAX:** 150 Hz

**EDGE TIMING RESOLUTION:** 540 ns

**OUTPUT VOLTAGES** (no load): high 5.0 V ±0.1 V; low <0.1

**OUTPUT RESISTANCE:** 330 ohms

**INPUT STATE:** high 3.8 to 16 V; low -8.0 to 1.2 V

**INPUT HYSTERESIS:** 1.4 V

**INPUT RESISTANCE:** 100 kohms

## SWITCHED 12 V (SW-12)

One independent 12 V unregulated sources switched on and off under program control. Thermal fuse hold current = 900 mA @ 20°C, 650 mA @ 50°C, 360 mA @ 85°C.

## CE COMPLIANCE

**STANDARD(S) TO WHICH CONFORMITY IS DECLARED:** IEC61326:2002

## COMMUNICATIONS

### RS-232 PORTS:

9-pin: DCE port for battery-powered computer or non-CSI modem connection.

COM1 to COM4: Four independent Tx/Rx pairs on control ports (non-isolated); 0 to 5 VUART

Baud Rates: selectable from 300 bps to 115.2 kbps.

Default Format: 8 data bits; 1 stop bits; no parity

Optional Formats: 7 data bits; 2 stop bits; odd, even parity

**CS I/O PORT:** Interface with CSI peripherals

**SDI-12:** Digital control ports 1, 3, 5, and 7 are individually configured and meet SDI-12 Standard version 1.3 for datalogger mode. Up to ten SDI-12 sensors are supported per port.

**PERIPHERAL PORT:** 40-pin interface for attaching CompactFlash or Ethernet peripherals

**PROTOCOLS SUPPORTED:** PakBus, Modbus, DNP3, FTP, HTTP, XML, POP3, SMTP, Telnet, NTCIP, NTP, SDI-12, SDM

## CPU AND INTERFACE

**PROCESSOR:** Renesas H8S 2322 (16-bit CPU with 32-bit internal core)

**MEMORY:** 2 MB of Flash for operating system; 4 MB of battery-backed SRAM for CPU usage, program storage and data storage.

**CLOCK ACCURACY:** ±3 min. per year. Correction via GPS optional.

## SYSTEM POWER REQUIREMENTS

**VOLTAGE:** 9.6 to 16 Vdc (reverse polarity protected)

**EXTERNAL BATTERIES:** 12 Vdc nominal

### TYPICAL CURRENT DRAIN:

Sleep Mode: 0.7 mA (0.9 mA max.)

1 Hz Sample Rate (1 fast SE meas.): 1 mA

100 Hz Sample Rate (1 fast SE meas.): 16.2 mA

100 Hz Sample Rate (1 fast SE meas. w/RS-232 communication): 27.6 mA

Optional Keyboard Display On (no backlight): add 7 mA to current drain

Optional Keyboard Display On (backlight on): add 100 mA to current drain

## PHYSICAL

**DIMENSIONS:** 9.4" x 4" x 2.4" (23.9 x 10.2 x 6.1 cm); additional clearance required for serial cable and sensor leads.

**WEIGHT:** 2.1 lbs (1 kg)

## WARRANTY

3-years against defects in materials and workmanship.

