



MTP 5

AIR TEMPERATURE PROFILES BY MICROWAVE TECHNOLOGY

State of the art microwave radiometer
All-weather operation
Reliable performance
Fast response time
Passive measurement

Ideal for air pollution and climatology studies
Wide operating temperature range
Self-calibrating
Low operating costs
Very low environmental impact

INTRODUCTION

There are a number of applications in meteorological and environmental sciences where it is desirable to measure the temperature of the atmosphere in the 1000 m closest to the ground. This is part of the Planetary Boundary Layer (PBL). As altitude increases the air temperature falls with a theoretical 'Adiabatic Lapse Rate' of approximately 6.5 °C per 1000 m, but this rate is influenced by a number of factors.

Under Adiabatic conditions pollutant gases, aerosols and fine particulates tend to rise into the atmosphere and disperse. However, in the case of a temperature inversion a layer of warmer air can trap the pollutants close to the ground. This leads to poor air quality events that can last for many hours until the inversion breaks up.

By monitoring the atmospheric temperature profile in real-time it is possible to predict the development and break-up of inversions within a specific area and actions can be taken to minimise the environmental and health impacts. Many industries have processes which release gasses into the atmosphere, but this should not take place when an inversion is present. Temperature profiles are an essential input for accurate plume and dispersion modelling.

The MTP 5 family of instruments from Kipp & Zonen is specifically designed to provide real-time PBL measurements with all-weather, unattended operation and automatic self-calibration. They require no specialist knowledge to install, maintain and operate or to analyse the data, and are ideal for network use. MTP 5 uses a uniquely designed compact and rugged microwave receiver which is highly sensitive to atmospheric 'black-body' thermal radiation at 5 mm wavelength (60 GHz frequency). MTP 5 emits no radiation and does not require any operating licences.

MTP 5 is quick and simple to set up and most versions can be easily transported to different locations. Typically the instrument is mounted on a platform a few meters above ground level or on the roof of a building. The instrument is connected to a PC running the operating software, which stores the data, calculates the temperature profiles using specially developed algorithms, and displays the results graphically every 5 minutes.

MTP 5 is unique, in that it requires no specialist knowledge to operate. It self-calibrates and produces the temperature profiles automatically in all conditions in real time.

APPLICATIONS

MTP 5 has important applications in the monitoring of urban air quality. It offers a simple, fast and economical solution for forecasting and for aiding the process of issuing public information. Typically a small network of 2 or 3 instruments is used, one in the city centre and others in areas from which changes in atmospheric conditions originate.

MTP 5 data are useful for scheduling releases from industrial processes and as inputs to computer models that predict the dispersion of gasses deliberately or accidentally released.


Other applications include:

- Investigation into urban heat island effects
- Monitoring of atmospheric stability at airports
- Regional and mesoscale forecasting in meteorology
- Input to emergency management systems of nuclear power stations and petrochemical facilities
- Support of energy balance studies and fog forecasting
- Research into radio wave and laser beam propagation
- Atmospheric chemistry research

CHOICE OF INSTRUMENT

MTP 5 is a remote sensing instrument that measures microwave radiation emitted from the lower 600 - 1000 m of the atmosphere, within the Planetary Boundary Layer. The atmosphere is a strong source of radiation but the changes due to temperature are small, so a very sensitive receiver is required. Unique radiometers and specially designed antennae operating in the 5 mm waveband form the heart of MTP 5.


Atmospheric radiation is measured by scanning in angular steps from horizontal to vertical and the operating software processes the data into vertical height and temperature information. The data is stored and profiles are displayed graphically every 5 minutes, typically showing the temperature at 50 m height intervals.

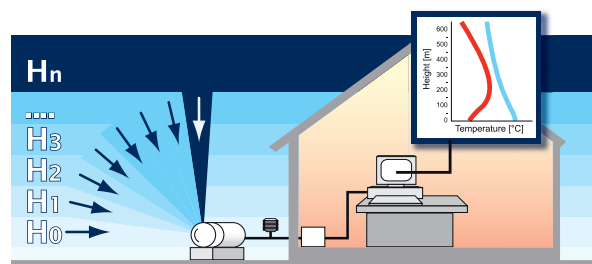


Measurement principle

MODELS


MTP 5 is a family of instruments sharing design features and components and they have common software and data formats. The choice of model depends on the application and the measurement location characteristics.

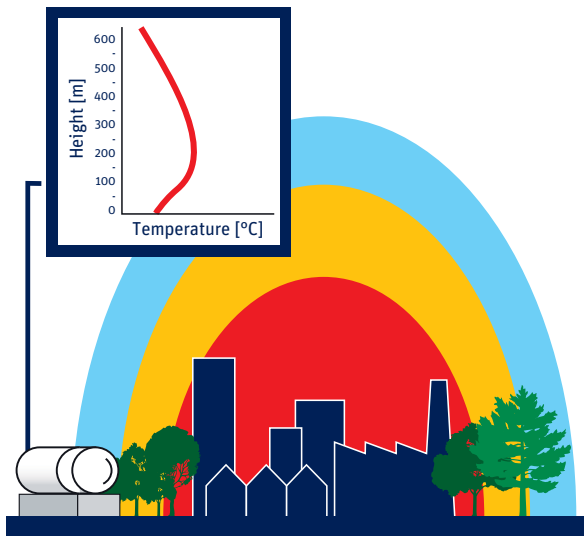

A temperature inversion, typically in the early morning, the gasses and aerosols are trapped close to the ground.

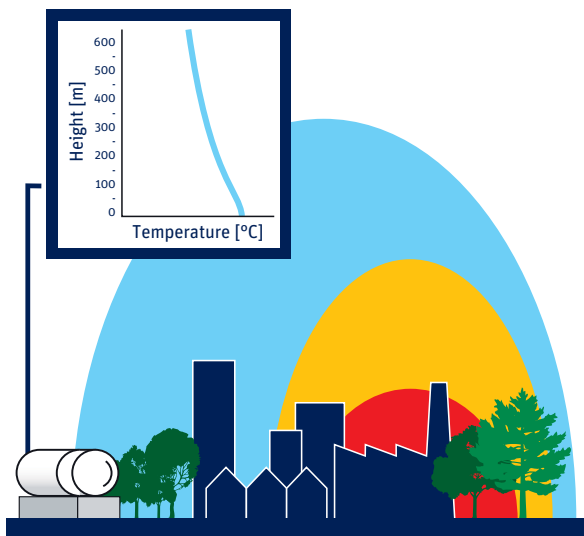

During the day the profile becomes adiabatic as the gasses and aerosols escape to higher levels.

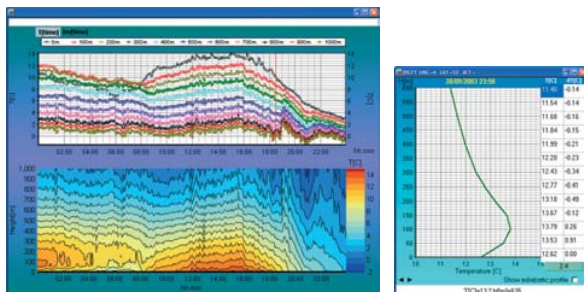

The temperature field display and the temperature profile

MTP 5-H is the original member of the family. It makes measurements up to 600 m above the instrument and gives the same performance in all weather conditions. It is compact and operates from 12 VDC (a bench-type AC-DC power supply unit is included). The rotating scanner assembly is protected by a special Teflon™ cover that has very good microwave transmission. The cover sheds precipitation and allows compensation for dirt during the self-calibration. A high accuracy ambient temperature sensor forms part of the self-calibration system. A mounting frame is included, and cables for the temperature sensor, power and RS 232 data communication to a PC (not included).

Typically temperature inversions that cause bad air quality events occur well below 600 m, if they are higher than this there is not normally a problem.

Altitude resolution is 50 m and the temperature accuracy is ± 0.5 °C or better. The field of view is a 3 ° cone. The only routine maintenance is to periodically clean the Teflon™ scanner cover. MTP 5-H is ideal for use in urban environments and at airports and operates from -40 °C to +50 °C.

MTP 5-HE was developed for locations where the urban / industrial area lies in a valley or close to mountains and inversions up to 1000 m can cause problems.

In order to measure to 1000 m a more sensitive and narrower bandwidth design of microwave radiometer is used and the frequency is slightly shifted to 'see' further in the atmosphere. A consequence of this is that the altitude resolution and the temperature accuracy are not quite as good as the MTP 5-H and there is some reduction in accuracy in heavy rain or fog.


MTP 5-P (POLAR) uses the same microwave radiometer and electronics as the MTP 5-H. However, it is designed to provide much improved altitude resolution, down to 10 m in the first 100 m range. This is important for measurements over snow and ice, where temperature gradients can be very steep over small height increments. Similar effects can be observed over desert surfaces.

To achieve this improved resolution a much narrower field-of-view is required, 1 ° or less. A larger capture area is therefore needed in order to maintain the signal-to-noise performance. A parabolic dish antenna has the radiometer attached directly to it and is rotated in very small angular steps. The Teflon™ cover does not rotate, therefore dirt is not compensated for and the cover must be kept clean.

The housing of MTP 5-P is much larger than that of MTP 5-H and MTP 5-HE and is designed for operation in typical Polar conditions, as encountered in the Arctic and Antarctic.

WINDOWS™ SOFTWARE runs on a PC connected to the MTP 5 and controls system configuration, measurement, data storage, processing, diagnostics and auto-calibration. The data is stored as daily ASCII files for easy export to spreadsheets. After each scan, a graph of the temperature profile is shown on-screen. Daily graphs of temperatures can also be displayed.

Dimensions MTP 5-H and MTP 5-HE

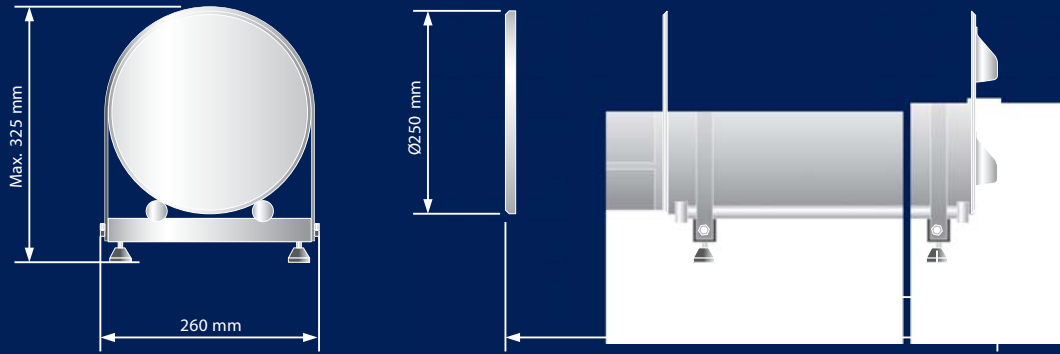

Specifications	MTP 5-H	MTP 5-HE	MTP 5-P
Altitude range	0 - 600 m	0 - 1000 m	0 - 600 m
Altitude resolution	50 m	50 m to 120 m ⁽¹⁾	10 m to 50 m ⁽²⁾
Displayed height interval	50 m	50 m	10 m
Measurement interval	Minimum 180 s	Minimum 180 s	Minimum 180 s
Temperature accuracy adiabatic	± 0.2 °C	± 0.3 - 0.4 °C ⁽³⁾	± 0.2 °C
Temperature accuracy inversion	± 0.5 °C	± 0.8 - 1.2 °C ⁽³⁾	± 0.5 °C
Central measurement frequency	59.6 GHz	56.7 GHz	59.6 GHz
Receiver sensitivity (1 second integration time)	0.04 °C	0.1 °C	0.04 °C
Scanner	Rotating Teflon™ cover and parabolic reflector driven by stepping motor, conical antenna and radiometer fixed to chassis on scanner axis, rotating cover sheds precipitation		Fixed Teflon™ cover, Cassegrainian antenna and radiometer assembly rotate inside fixed cover
Scan angles	From horizontal to vertical	From horizontal to vertical	From horizontal to vertical
Field of view, conical	3 °	3 °	< 1 °
Environmental effects	No effect from rain, fog or snow	Slight decrease in accuracy in heavy rain or fog	Precipitation on cover reduces accuracy
Operating temperature range	-40 °C to +50 °C	-40 °C to +50 °C	-50 °C to +45 °C
Communication to PC	Serial RS 232 ⁽⁴⁾	Serial RS 232 ⁽⁴⁾	Serial RS 232 ⁽⁴⁾
Power requirements AC/DC power supply	220 VAC / 110 VAC, 1A / 2A 50 - 60 Hz	220 VAC / 110 VAC, 1A / 2A 50 - 60 Hz	220 VAC / 110 VAC, 2A / 4A 50 - 60 Hz
Power consumption MTP 5	Maximum 12 VDC / 120 W (60 W average)	Maximum 12 VDC / 120 W (60 W average)	AC power only
Self-calibration	Automatic before each measurement	Automatic before each measurement	Automatic before each measurement
Correction for dirt or precipitation on cover	Automatic until cleaning needed due to poor signal-to-noise ratio	Automatic until cleaning needed due to poor signal-to-noise ratio	Not possible, cover must be kept clean
Instrument dimensions, nominal	59 cm long x 25 cm diameter	59 cm long x 25 cm diameter	90 x 90 x 90 cm
Instrument weight, nominal	20 kg	20 kg	100 kg

⁽¹⁾ MTP 5-HE altitude resolution decreases from 50 m at 100 m altitude to 120 m at 1000 m altitude.

⁽²⁾ MTP 5 Polar altitude resolution decreases from 10 m at 100 m altitude to 50 m at 600 m altitude.

⁽³⁾ MTP 5-HE temperature accuracy decreases with altitude from 500 m to 1000 m.

⁽⁴⁾ MTP 5 must be connected to a PC (not included) running the MTP 5 operating software in order to make measurements and store data.

For reliable long-term operation a desk-top PC with genuine RS 232 port should be used. Communication via serial-to-USB converters cannot be guaranteed.



Go to www.kippzonen.com for your local distributor

HEAD OFFICE

Kipp & Zonen B.V.
 Delftechpark 36, 2628 XH Delft
 P.O. Box 507, 2600 AM Delft
 The Netherlands
 T: +31 (0) 15 2755 210
 F: +31 (0) 15 2620 351
 info@kippzonen.com

Kipp & Zonen B.V. reserve the right to alter specifications of the equipment described in this documentation without prior notice

CAMPBELL SCIENTIFIC
 CANADA CORP.
 11564 - 149 street - edmonton - alberta - T5M 1W7
 tel 780.454.2505 fax 780.454.2655
www.campbellsci.ca

4414475-1008