

**SDS511  
CS I/O DUAL PORT ADAPTOR  
INSTRUCTION MANUAL**

**4/02**

**COPYRIGHT (c) 2002 CAMPBELL SCIENTIFIC, INC.**



## WARRANTY AND ASSISTANCE

This equipment is warranted by CAMPBELL SCIENTIFIC (CANADA) CORP. ("CSC") to be free from defects in materials and workmanship under normal use and service for **twelve (12) months** from date of shipment unless specified otherwise. \*\*\*\*\* **Batteries are not warranted.** \*\*\*\*\* CSC's obligation under this warranty is limited to repairing or replacing (at CSC's option) defective products. The customer shall assume all costs of removing, reinstalling, and shipping defective products to CSC. CSC will return such products by surface carrier prepaid. This warranty shall not apply to any CSC products which have been subjected to modification, misuse, neglect, accidents of nature, or shipping damage. This warranty is in lieu of all other warranties, expressed or implied, including warranties of merchantability or fitness for a particular purpose. CSC is not liable for special, indirect, incidental, or consequential damages.

Products may not be returned without prior authorization. To obtain a Return Merchandise Authorization (RMA), contact CAMPBELL SCIENTIFIC (CANADA) CORP., at (780) 454-2505. An RMA number will be issued in order to facilitate Repair Personnel in identifying an instrument upon arrival. Please write this number clearly on the outside of the shipping container. Include description of symptoms and all pertinent details.

CAMPBELL SCIENTIFIC (CANADA) CORP. does not accept collect calls.

Non-warranty products returned for repair should be accompanied by a purchase order to cover repair costs.



**CAMPBELL SCIENTIFIC**  
C A N A D A C O R P .

11564 - 149 street - edmonton - alberta - T5M 1W7  
tel 780.454.2505 fax 780.454.2655

[www.campbellsci.ca](http://www.campbellsci.ca)



# ***SDS511 Dual Port Adaptor***

---


## **1. Introduction**

The SDS511 dual port adaptor allows two modem-enable (ME) or SDC devices to share a physical connection with a single CS I/O port on a CR500, CR510, CR10, CR10X or CR23X Campbell Scientific datalogger. Although only one communications device can be electronically connected to the CS I/O port at any one time, the SDS511 connects the CS I/O port to either of the two devices on a first-in-first-served basis. If one communications device has access to the CS I/O port and the second device requests a connection, no connection will be made until the first device has terminated its session. The SDS511 does NOT allow concurrent communications between the two communications devices and the CS I/O port.

## **2. Installation**

The SDS511 can be mounted on an enclosure backplane using the backplane grommet and screw included. Alternatively, the SDS511 can be mounted on the enclosure wall using double-sided adhesive tape or velcro. The single flying lead with DB9 connector is connected into the datalogger's I/O port. The two DB9 connectors on top of the SDS511 are for connecting up to two ME or SDC communications devices. With the 2 DB9 connectors facing upwards and the datalogger communications cable on the left, the top DB9 is numbered Port 1 and the bottom DB9 is numbered Port 2. Port 1 can be used for both SDC (CR10KD, COM300, etc) and ME devices. Port 2 can be used for ME devices only. These include a computer, Palm device, SC932, COM200, CD294, etc. Up to three SDS511 devices can be cascaded if further devices are required.

The SDS511 is ideally suited to communications devices which access the CS I/O port intermittently for short duration. These include the CD294 DataView Display, CR10KD, notebook computer, Palm device and telephone modems. It is not suited to communication devices which tie-up the CS I/O port for extended periods.

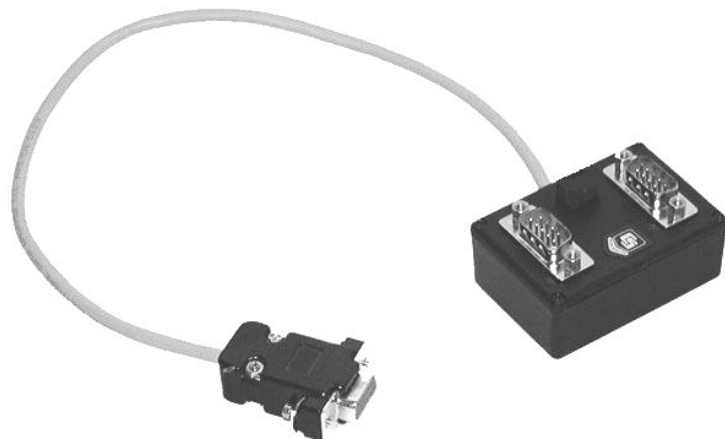

## 3. Hardware

### SPECIFICATIONS

#### Physical

Width: 43 mm

Height: 63 mm

Depth: 33 mm

Weight: 60 g

Supply Requirements: 5 VDC (powered from datalogger)

#### Power

Current consumption:

Operating: < 5 uA typical

Operating temperature range:

-25°C to +55°C

#### Environmental

0-90% RH Non-condensing